

Tag Installation Instructions


These instructions are for the Frequent Parker and Zoom Lane Programs. Please mount tag on the driver's side of windshield.

Do Not Present The Tag By Holding In Hand



- Tag will NOT work if not mounted on windshield.

1 Choose a Location for Your Tag

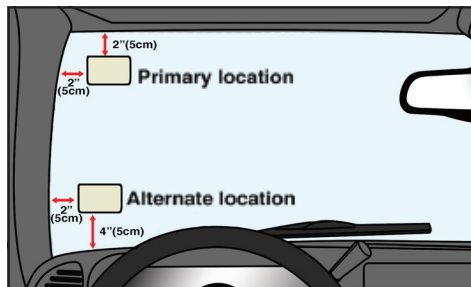

- Place on inside of windshield out of driver's line of sight.
- **Best Location:**
2 inches from top, 2 inches from left


2 Prep Your Windshield

- Windshield should be at least 50°F (10°C).
- Use heater/defroster, if necessary.
- Clean and wipe windshield dry before installing tag.





3 Peel off Release Tab

Hold tag so that the release liner is facing you. Locate release tab on the upper corner of the tag. Peel the release liner and expose the adhesive.

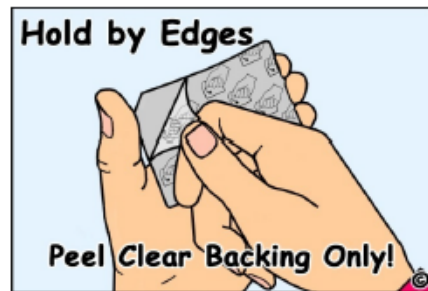

4 Press Tag Firmly Against Windshield a Few Seconds in Chosen Location



Removing Tag



- Peel off tag starting at the cut corner, then clean any adhesive residue remaining on the windshield.
- Once tag is removed, you cannot reuse it.